




## FILTER BOX

### Thermbond® Advantages in Filter boxes

The unique installation properties of Thermbond Refractory Products allow for time savings on new installations, repairs and precast production. The physical properties of Thermbond also provide outstanding performance characteristics. The Thermbond Advantage translates into less downtime, more production time and superior value.

*Rapid curing • Rapid heat-up • Non-wetting refractory • Thermal shock resistant*

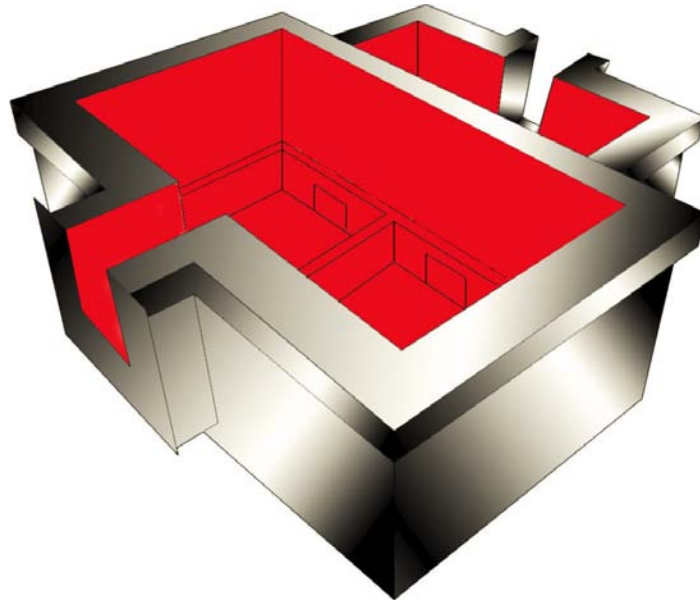

### THERMBOND® PRODUCT RECCOMENDATION

Thermbond Product*	Benefits
Formula 5-L	For moderate service conditions Excellent strength Non-wetting surface stays clean
Formula 2102	Insulating refractor High strengths Non-wetting surface stays clean
Formula 2104-L	For severe service conditions Excellent abrasions resistance Non-wetting surface stays clean
Formula 4-P/Formula 5-P	Patching materials Quick repairs Excellent bonding strength Non-wetting surface stays clean

\*Thermbond products are not limited to the products listed.

Contact Jeff Pchola at [jeff.pchola@thermbond.com](mailto:jeff.pchola@thermbond.com) for additional information